SNARLER ATS ACCESSORIES



Make the powersports your own business, you need a partner like Segway to provide reliable and durable vehicles as long as other shop promotion materials, make it professional and profitable.









REAR CARGO BOX

) A02H00052001



> 650*1086*370mm










AT6 L SKID PLATES


- **>** A03R21000001
- > Aluminum material
- Anodized surface
- > Thickness 2mm
- Weight 4.38Kg

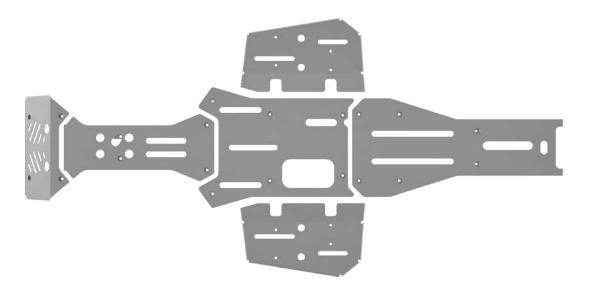



AT6 S SKID PLATES

- **>** A01R21000001
- > Aluminum material
- Anodized surface
- > Thickness 2mm
- Weight 4.08Kg

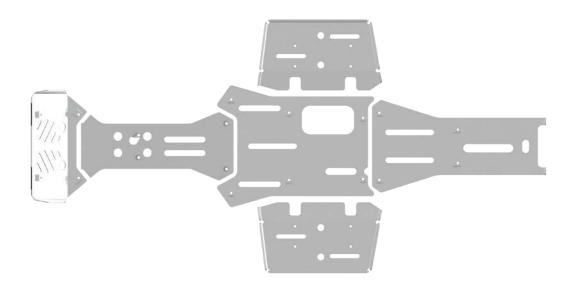

A-ARM PROTECTORS




- > A03R22000001
- > Aluminum material
- Anodized surface
- Thickness 2mm
- Weight 1.33Kg









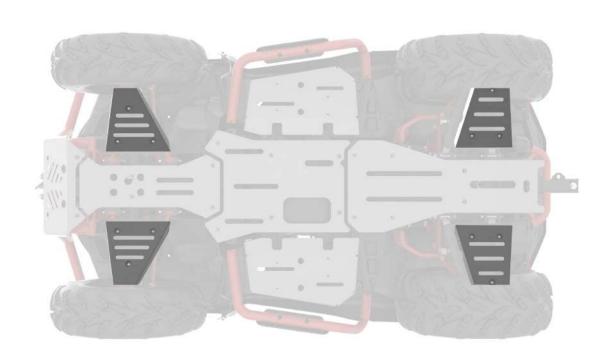

FRONT BUMPER



- > A03R20600201
- > Strengthen weld pipes
- > Electrophoresis & paint coated surface
- > Weight 6.13Kg





FRONT BUMPER



- > A03R20600301
- > Strengthen weld pipes
- > Electrophoresis & paint coated surface
- > Weight 6.13Kg





FRONT BUMPER



- > A03R20600401
- > Strengthen weld pipes
- > Electrophoresis & paint coated surface
- > Weight 6.13Kg








INVERTER GENERATOR



SPECIFICATION

Model	SGW2000i	SGW2500i	SGW2700i
Running power (W)	1800	2100	2100
Starting power (W)	2000	2400	3000
Continuous running time (hrs)	6-20	5-20	5-20
Noise level dB(A)@7m	52-59		
N.W.(kg)	19.5		
DC output	5V/2A USB 12V/8A Cig socket		
Dimension	512 x 315 x 447mm		
Container load (Pack in pallet)	272pcs @20'GP 544pcs @40'GP		
Container load (Pack in bulk)	280pcs @20'GP 584pcs @40'GP 730pcs @40'HQ		

OOL:	# F
ਤ੍ਰੇ SEGWAY	SGW2700i Inventer Generator
0 0	







INVERTER GENERATOR





AC receptacle, various for different countries;

US and Europe patented structure of dual-fan, dual-air channel, dual-muffler, and double-layer acoustic hood for better cooling, lower emission and noise.

MAIN FEATURES:

) 15% lower fuel consumption, especially conventional generators;

> 2.5% lower THD stable output for precise instrument;

> 50°C high-temperature environment workable, no overheating shut-down;

8 minutes to access to any part, for easy inspection, maintenance or repair;

Starting direct gravity fuel supply, for better recoil starting by 1-2 pulls;

Patented outer structure of fully-enclosed housing for strength and lower noise;

